


FED SUP CLASS
5305

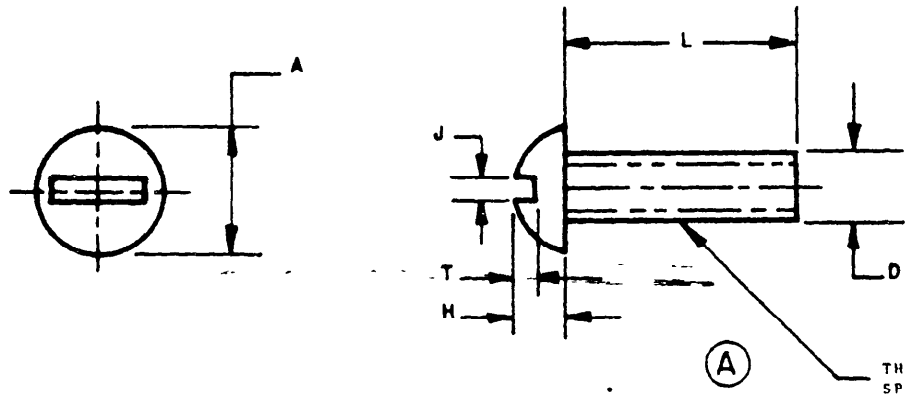

THREAD B
SPEC MIL-S-7742

(A)

SIZE	THREAD P	P DIA MAX	A DIA	I ± .006	J	T
4	4-40 UNC-2B	112	202 ± .009	.081	034 ± .006	051 ± .007 - .008
6	6-32 UNC-2B	138	250 ± .010	.097	039 ± .006	059 ± .008 - .009
8	8-32 UNC-2B	164	298 ± .011	.113	044 ± .006 - .007	067 ± .009 - .010
10	10-32 UNF-2B	190	347 ± .012 - .013	.130	048 ± .007	075 ± .011

LENGTH 1	DASH NUMBERS			
	4	6	8	10
1/8	4-2			
3/16	4-3	6-3	8-3	10-3
1/4	4-4	6-4	8-4	10-4
5/16	4-5	6-5	8-5	10-5
3/8	4-6	6-6	8-6	10-6

- (A) MATERIAL BRASS, SPEC QQ-B-626
- (A) FINISH SILVER PLATE QQ-C-365 OR TIN, MIL-T 10727
- (A) EXAMPLE OF PART NO AN508-6-3= #6 SCREW, 3/16 LONG
REMOVE ALL BURRS
DIMENSIONS IN INCHES
- (A) PACKAGE OR CONTAINER TO BE IDENTIFIED PER MIL STD-130

APPROVED 6 APR 85 REVISED (A) 23 MAR 84

P A AF 82 Other Cust ARMY-AV AF-89	INTERNATIONAL INTEREST	TITLE SCREW- ROUND HEAD MACHINE (FOR ELECT. USE)	AN508
	PROCUREMENT SPECIFICATION NOT REQUIRED	SUPERSEDES:	

DD FORM 672-1 (COORDINATED) 1 MAY 73

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT 5305-1503

USER ACTIVITIES

S. ARMY-MI
DLA-19

REVIEWER

This military document is approved for use by all Departments and Agencies of the Department of Defense. Selection for new engineering and design applications and for repetitive use shall be made from this document.