


This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP. CLASS  
5310

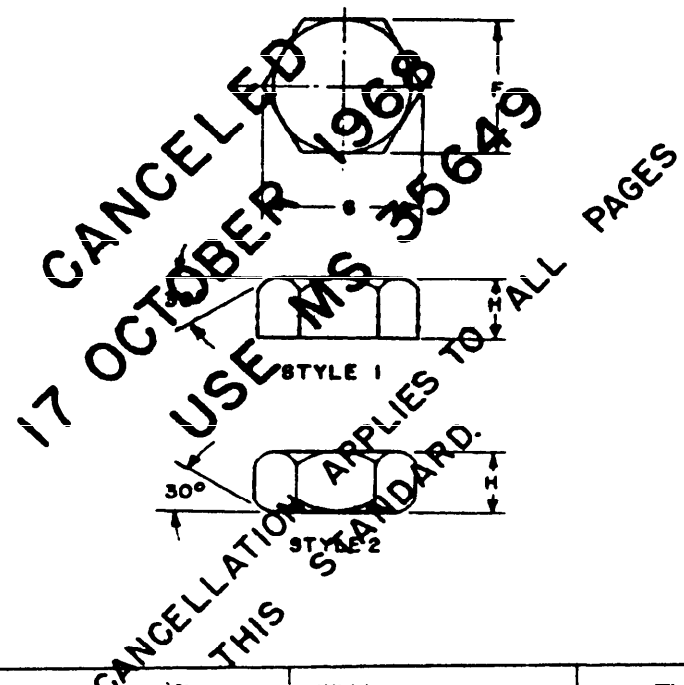

Nominal size	Width across flats (F)		Width across corners (C)		Thickness (H) Styles 1 and 2	
	Maximum	Minimum	Maximum	Minimum	Maximum	Minimum
2	0.187	0.180	0.270	0.205	0.066	0.057
4	.250	.241	.289	.275	.098	.057
6	.312	.302	.361	.344	.114	.102
8	.343	.332	.397	.372	.130	.117
10	.375	.362	.433	.413	.130	.117
1/4	.437	.422	.505	.482	.193	.172
5/16	.562	.543	.650	.621	.225	.208
3/8	.625	.607	.722	.692	.257	.239

(Project 5310-N028Sh) (A) For changes see sheets 1 and 2

APPROVED 19 MAY 1957 REVISED (A) 19 AUGUST 1966 (B) 17 OCTOBER 1968

CUSTODIANS Ships	OTHER INT. A - N - AF -	<b>MILITARY STANDARD</b>	<b>MS 16210</b> (SHIPS)
		NUTS, PLAIN, HEXAGON, MACHINE SCREW, UNC-2B, NONMAGNETIC	
Program Specification (A) FF-N-836		SUPERSEDES:	SHEET 1 OF 2