




FED SUP CLASS
5940

This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product or design covered herein in engineering, design and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

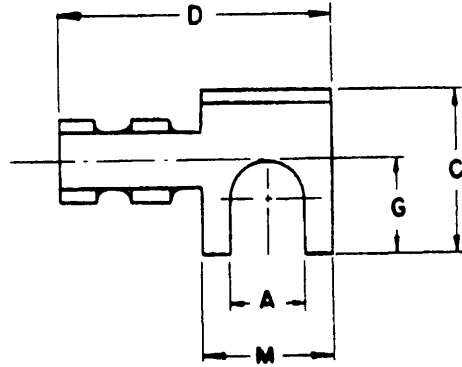

DASH NO.	FI IN	WIRE SIZE AWG NOM	STUD SIZE	A		B	C	D	E	F	G	H	L	M
				MIN	MAX									
1		10	8	.167	.179	1/8	3/8	2/32	11/64	3/8	7/32	±.003	3/32	19/64

MATERIAL: COPPER, ANNEALED - SPECIFICATION QQ-C-576.

FINISH: HOT TIN DIP OR ELECTRODEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0005 INCHES.

- NOTES:**
1. ALL DIMENSIONS IN INCHES. TOLERANCES: FRACTIONAL $\pm 1/64$ UNLESS OTHERWISE SPECIFIED.
 2. REMOVE ALL BURRS.
 3. REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.
 4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.

CUSTOMERS ORD SHIPS USAF	OTHER INT. I-SIG T I-AOR Y AF-	MILITARY STANDARD		MS35441
		TERMINAL LUG, SOLDER TYPE, COPPER STAMPING, INSULATION GRIP, SLOTTED FLAG		
PROCUREMENT SPECIFICATION MTL-T-15659		SUPERSEDES:		PART 1 OF 1

DD FORM 1 OCT 52 672-1

APPROVED 5 JULY 55 REVISED A 23 JULY 56

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the fact that the Government has approved the use of such drawings, specifications, or other data for certain Government operations does not constitute an authorization or endorsement of any of the views or opinions expressed hereon, or the fact that the Government may have furnished, furnished, or in any way supplied the said drawings, specifications, or other data for certain Government operations.