


This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product or design covered herein in engineering, design and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

FED SUP CLASS
5940

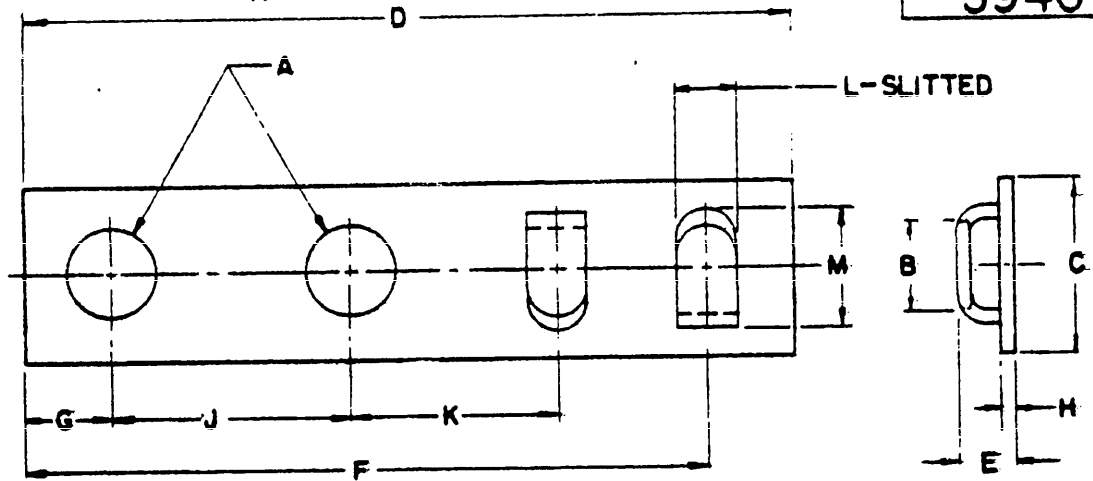

DASH NO.	FINN	WIRE SIZE AWG NOM	STUD SIZE	A HOLE DIA		B	C	D	E	F	G	H	J	K	L	M
				MIN	MAX											
1	151-9379	6	8	.167	.179	3/16	3/8	2-1/8	1/8	1-7/8	3/16	±.003	7/8	1/2	1/8	1/4
2	151-9378	6	10	.193	.205	3/16	3/8	1-5/8	1/8	1-7/8	3/16	±.003	1/2	7/16	1/8	1/4

MATERIAL: COPPER, ANNEALED - SPECIFICATION QQ-C-576.

FINISH: HOT TIN DIP OR ELECTRODEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0005 INCHES.

- NOTES:**
1. ALL DIMENSIONS IN INCHES. TOLERANCES: FRACTIONAL $\pm 1/64$ UNLESS OTHERWISE SPECIFIED.
 2. REMOVE ALL BURRS.
 3. REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.
 4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.

CUSTOMERS:

Onp
Samp
USAF

OTHER INT.

- SAG: TE
- A OR T
M-

MILITARY STANDARD
TERMINAL, LUG, SOLDER TYPE,
COPPER STAMPING, TWO HOLE, FLAT, SLITTED

MS35445

PROFORMITY SPECIFICATION
MIL-T-15659

SUPERSEDES:

UNIT 1 of 1

DD FORM 1 OCT 52 672-4

145144

This document contains technical data which is the property of the United States Government and is loaned to your organization for your information only. It and its contents are not to be distributed outside your organization.

APPROVED FOR PUBLICATION BY THE SECRETARY OF DEFENSE, 1953 JULY 56