


This document has been promulgated by the Department of Defense as the military standard to limit the selection of the item, product or design covered herein in engineering, design and procurement. This standard shall become effective not later than 90 days after the latest date of approval shown.

FED SUP CLASS  
5940

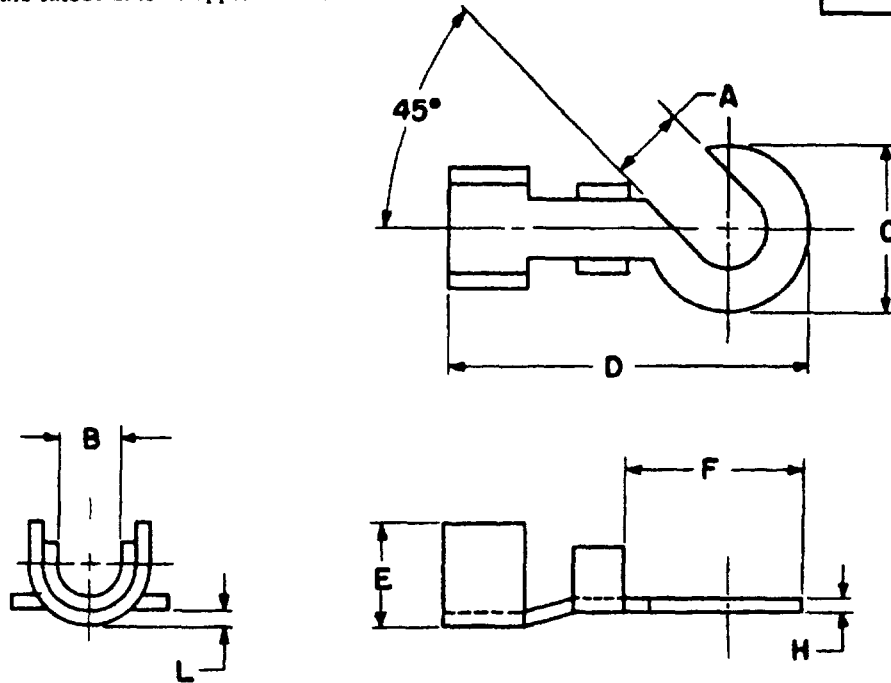

DASH NO.	FINN	WIRE SIZE AWG NOM	STUD SIZE	A		B	C	D	E	F	H	L
				MIN	MAX							
1		4	5/16	.320	.347	1/4	11/16	1-9/16	7/16	25/32	±.003 .064	1/16

**MATERIAL:** COPPER, ANNEALED - SPECIFICATION QQ-C-576.

**FINISH:** HOT TIN DIP OR ELECTRODEPOSITED TIN ALL OVER, MINIMUM THICKNESS .0005 INCHES.

**NOTES:** 1. ALL DIMENSIONS IN INCHES. TOLERANCES: FRACTIONAL  $\pm 1/64$  UNLESS OTHERWISE SPECIFIED.

2. REMOVE ALL BURRS.

3. REFERENCED DOCUMENTS OF ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS SHALL APPLY.

4. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER.

APPROVED 5 JULY 55 REVISED A 23 JULY 56

CUSTOMERS O&D SINCS USAF	OTHER INT. I-S&E T E I-A OR Y U-
PROCUREMENT SPECIFICATION MIL-T-15659	

<b>MILITARY STANDARD</b>
<b>TERMINAL, LUG, SOLDER TYPE, COPPER STAMPING, INSULATION GRIP, SLOTTED, 45°</b>
DEPENDENCIES:

<b>MS 35442</b>
SHEET   OF   1

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a limited quantity of parts or material, it is the purchaser's obligation to obtain the fact that the Government may have formulated, furnished, or in any way supplied the said data and to secure the necessary permission in writing from the person or organization to whom such data were originally furnished or to whom such data were originally supplied.